


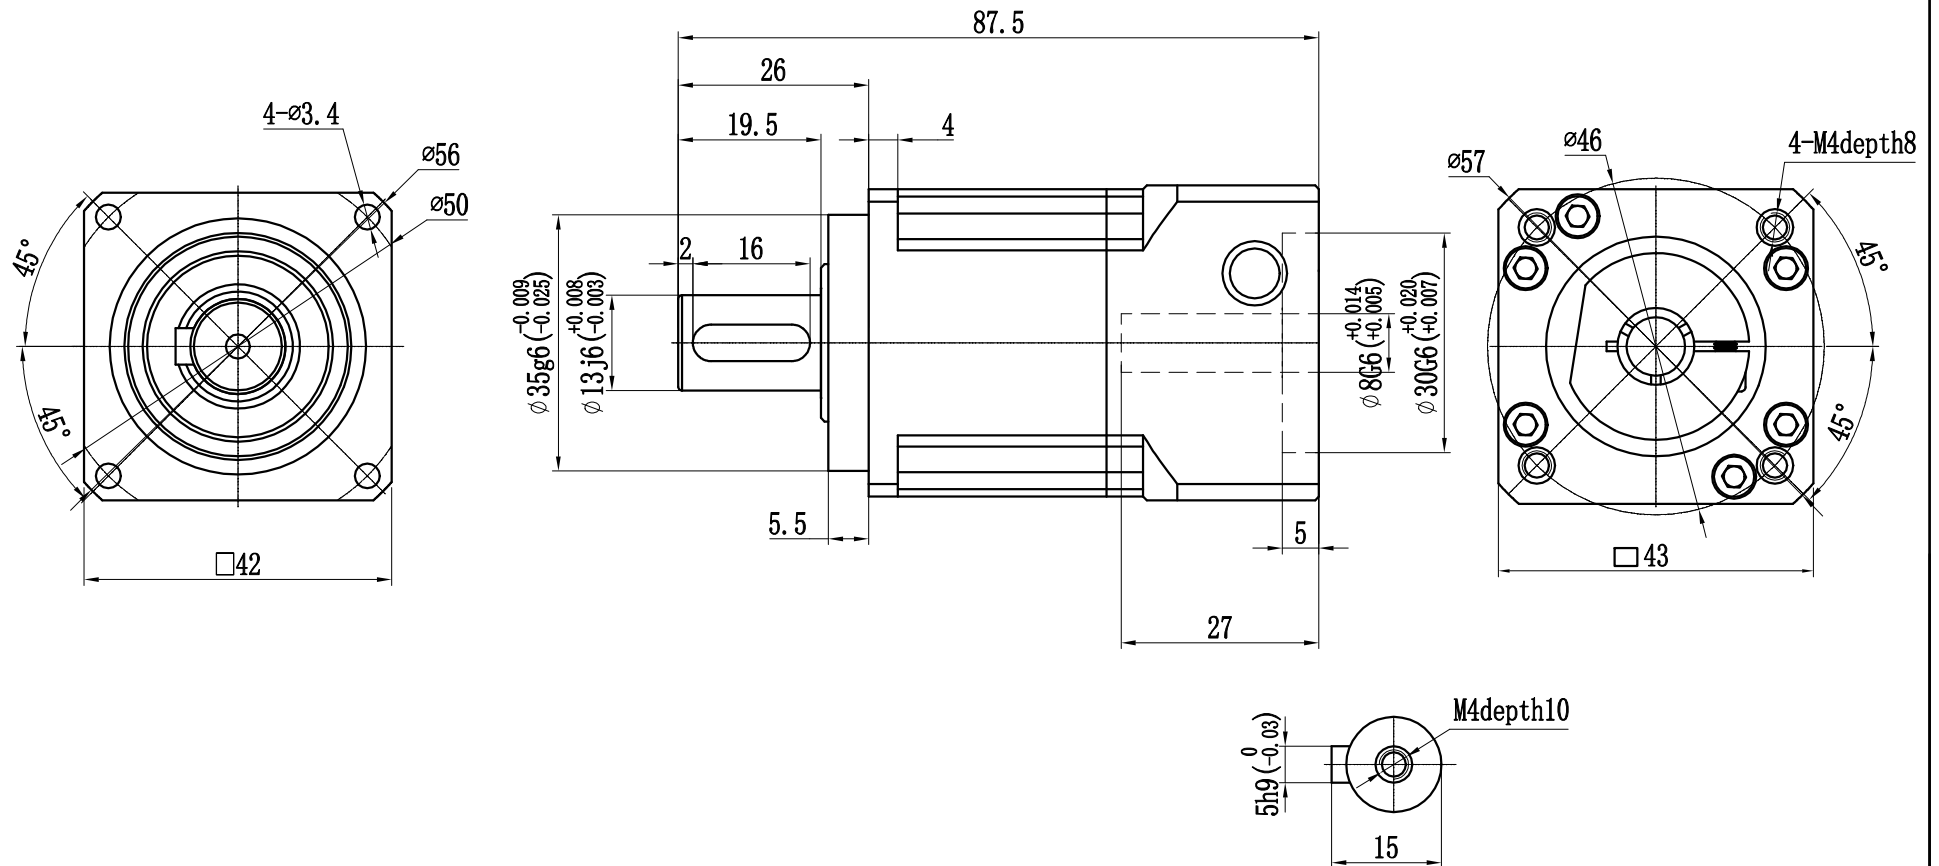

When input speed is 3000rpm

Reduction Ratio	1:4	1:5	1:6	1:7	1:8	1:9	1:10
Rated Output Torque(N.M)	19	22	20	19	17	14	14
Moment of inertia(Kgcm ²)	0.03	0.03	0.03	0.03	0.03	0.03	0.03
Noise (n=3000,noload,1m) (dB)	≤56dB						

Instant Torque(N.M)	3X RATED	Backlash(arcmin)	≤5
Reduction Stage	1	Rated Input Speed(rpm)	3000
Radial Load(N)	780	Max Input Speed(rpm)	6000
Axial Load(N)	390	Level Of Protection (IP)	IP65
Efficiency	≥97%	Weight(kg)	0.6

						Dimensional drawing			Source Engineering INC	
mark	revise	partition	reversion	sign	Y M D				model NO.	042SB□-100T3
design			standard			phase marker	weight	scale		
check						S		Full		
approval						Total 1		No. 1		
process			confirm							