


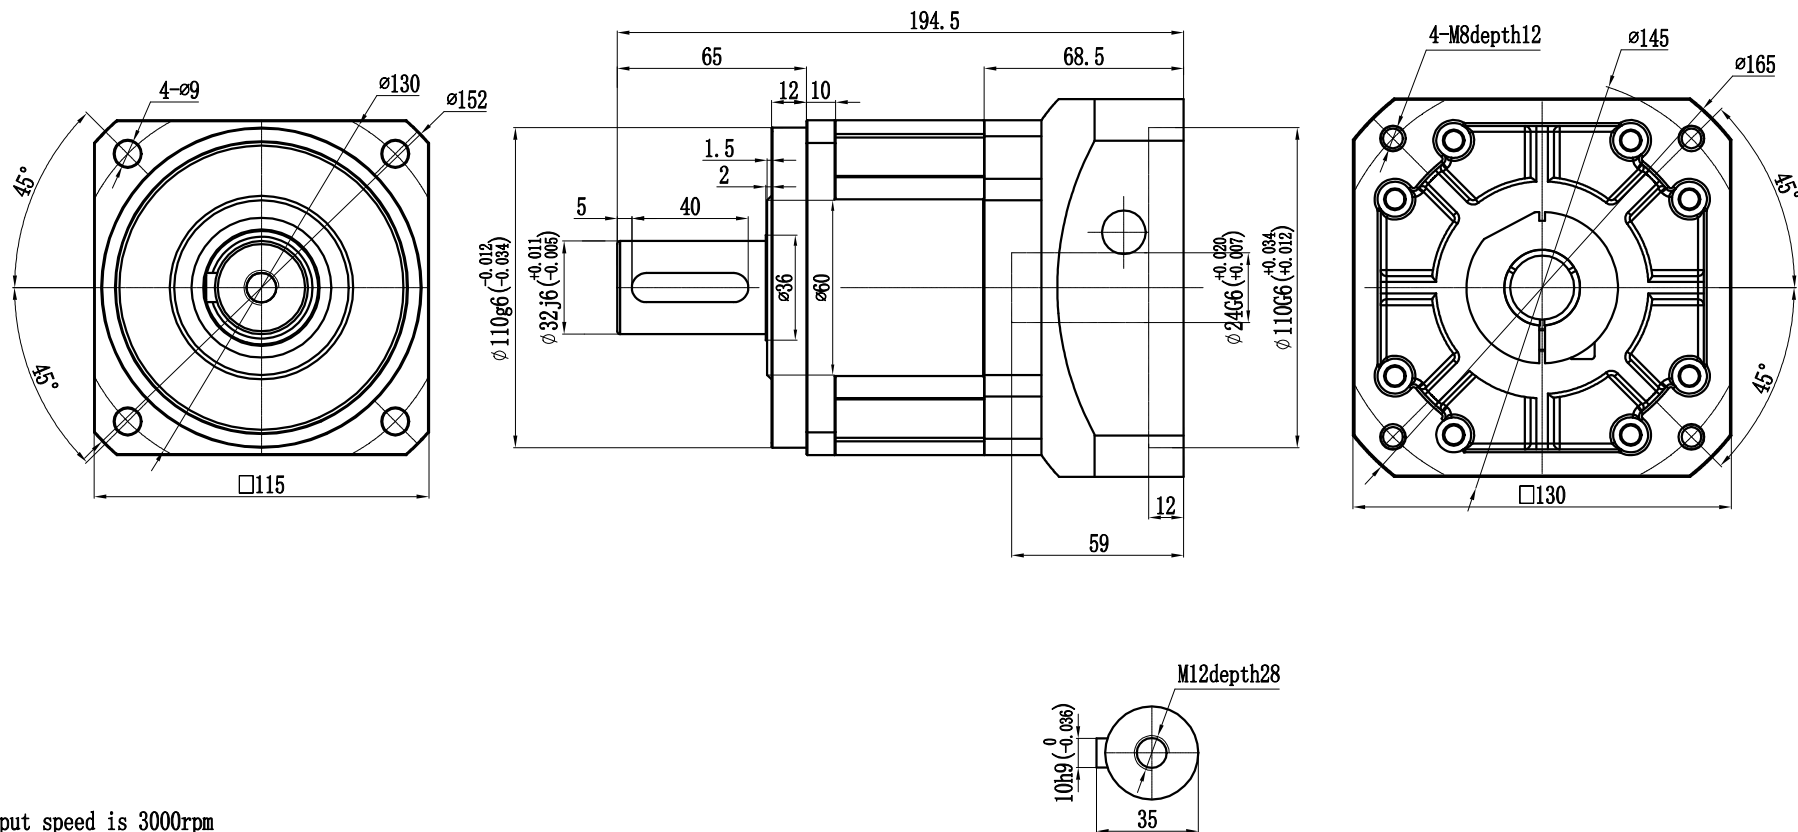

When input speed is 3000rpm

Reduction Ratio	1:3	1:4	1:5	1:6	1:7	1:8	1:9	1:10
Rated Output Torque(N.M)	208	290	330	310	300	260	230	230
Moment of inertia(Kgcm ²)	3.25	2.74	2.71	2.65	2.62	2.58	2.57	2.57
Noise (n=3000,noload,1m) (dB)	≤63dB							
Instant Torque(N.M)	3X RATED		Backlash(arcmin)		≤5			
Reduction Stage	1		Rated Input Speed(rpm)		3000			
Radial Load(N)	6700		Max Input Speed(rpm)		6000			
Axial Load(N)	3350		Level Of Protection (IP)		IP65			
Efficiency	≥97%		Weight(kg)		7.8			

						Dimensional drawing				Source Engineering INC	
										model NO.	115SB□-1000T7
mark	revise	partition	reversion	sign	Y M D						
design			standard			phase marker		weight	scale		
check											
aproval						S				Full	
process			confirm			Total 1		No. 1			