


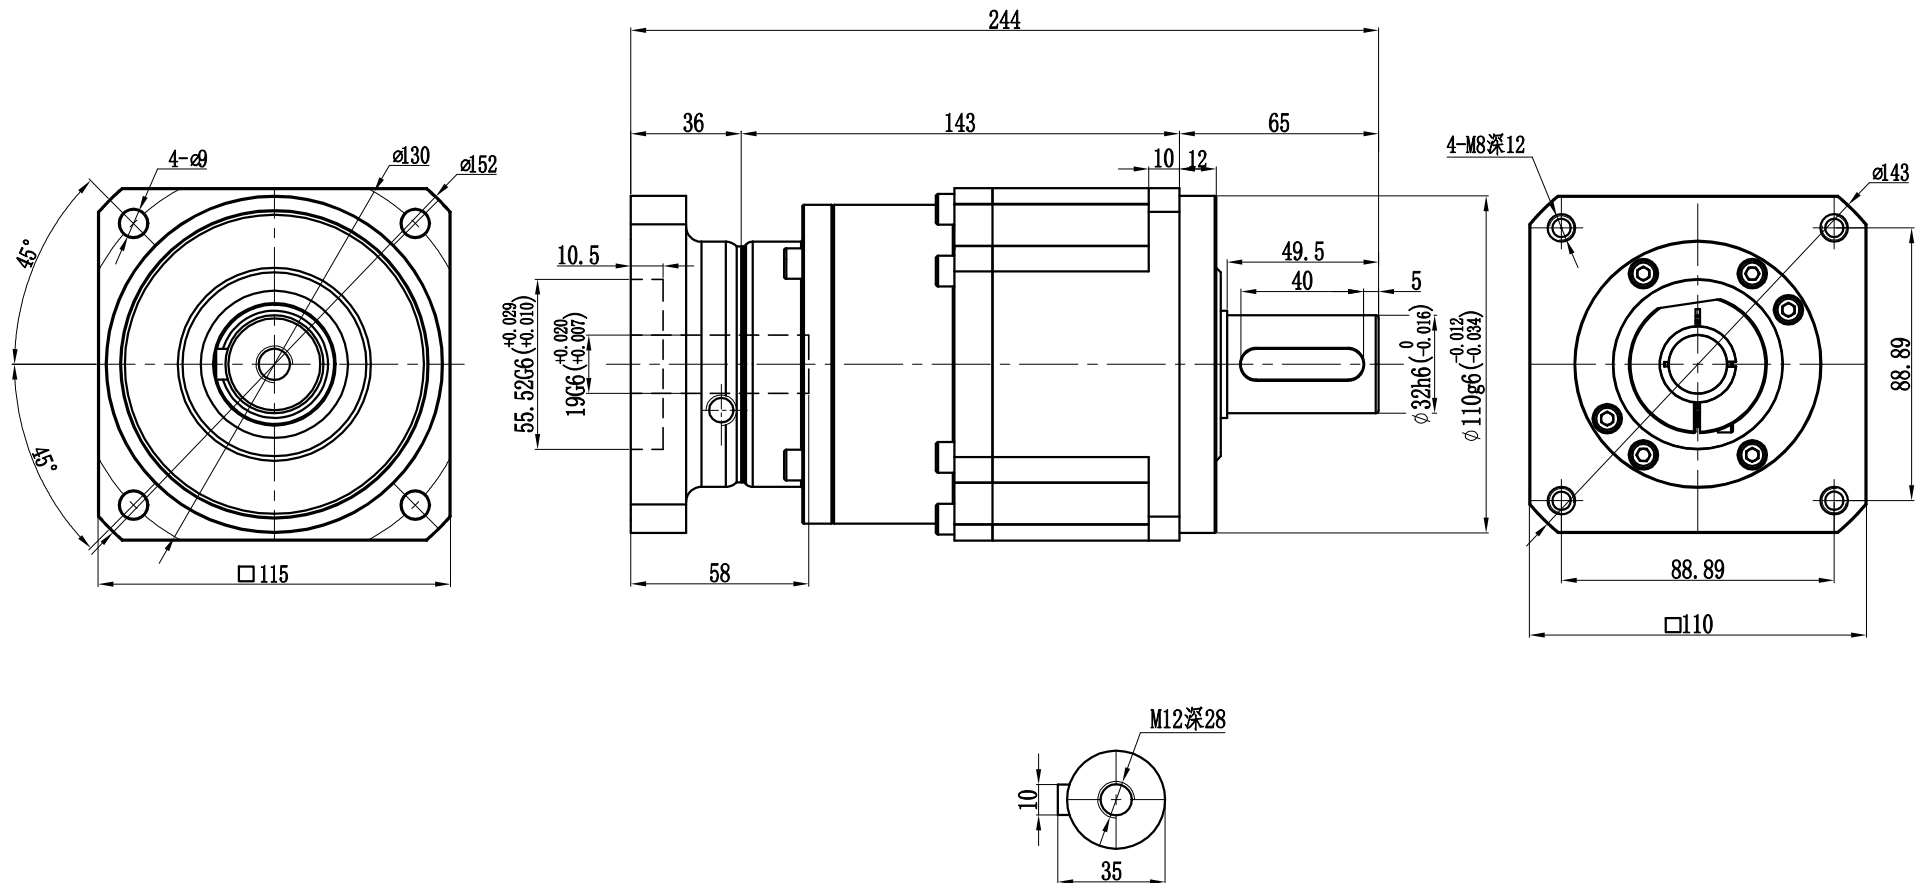

Reduction Ratio	1:15	1:20	1:25	1:30	1:35	1:40	1:45	1:50	1:60	1:70	1:80	1:90	1:100
Rated Output Torque(N.M)	208	290	330	310	300	260	230	330	310	300	260	230	230
Moment of inertia(Kgcm ²)	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.44	0.44	0.44	0.44	0.44	0.44
Noise (n=3000,no load,1m) (dB)	≤63dB												

Instant Torque(N.M)	3X RATED	Backlash(arcmin)	≤7
Reduction Stage	2	Rated Input Speed(rpm)	3000
Radial Load(N)	6700	Max Input Speed(rpm)	6000
Axial Load(N)	3350	Level Of Protection (IP)	IP65
Efficiency	≥94%	Weight(kg)	9

						Dimensional drawing			Source Engineering INC	
mark	revise	partition	reversion	sign	Y M D				model NO.	115SB二级-0001
design			standard			phase marker	weight	scale		
check						S		Full		
approval										
process			confirm			Total	1	No.	1	