


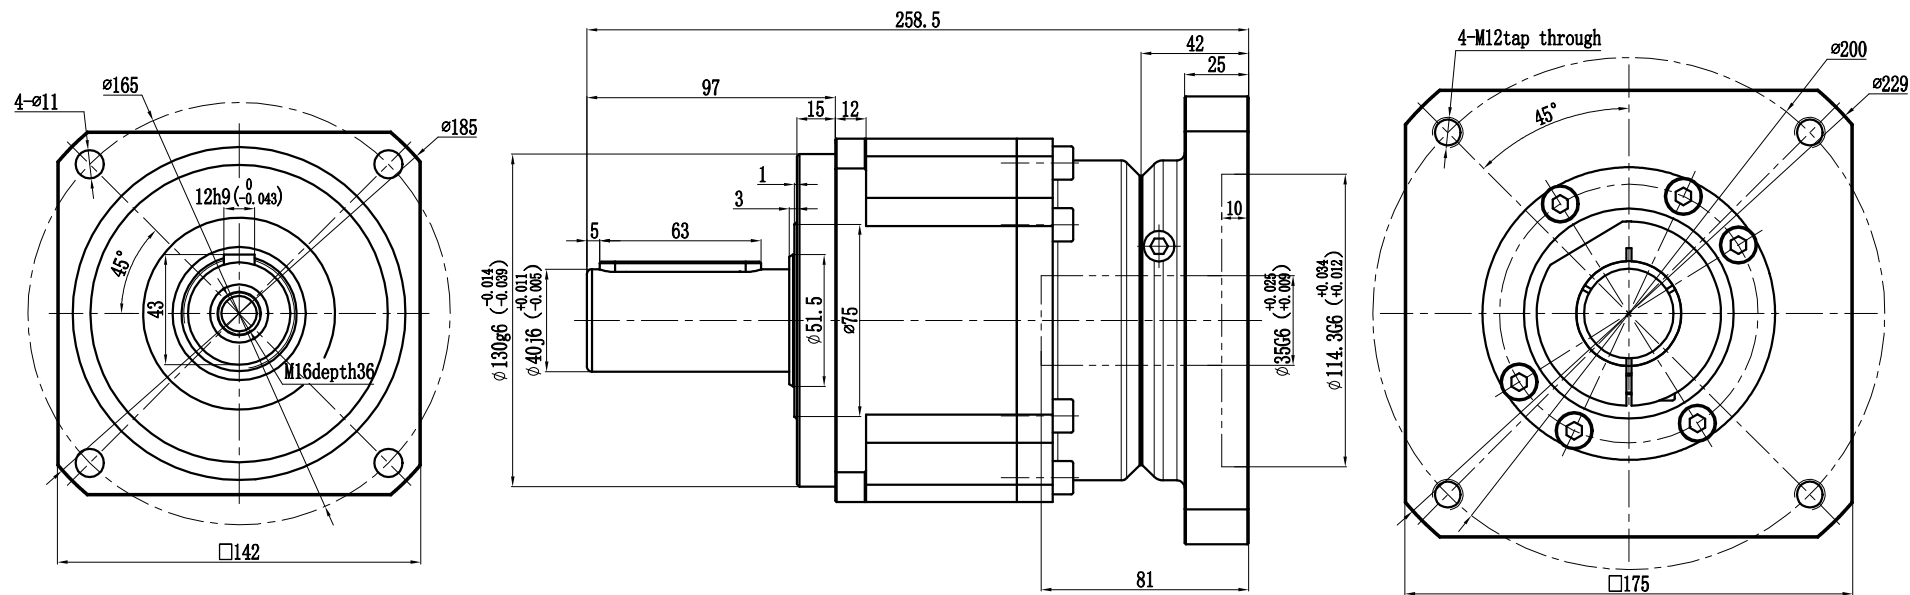

Reduction Ratio	1:3	1:4	1:5	1:6	1:7	1:8	1:9	1:10
Rated Output Torque(N.M)	342	542	650	600	550	500	450	450
Moment of inertia(Kgcm ²)	9.21	7.54	7.42	7.25	7.14	7.07	7.04	7.03
Noise (n=3000,no load,1m) (dB)	≤65dB							
Instant Torque(N.M)	3X RATED		Backlash(arcmin)		≤5			
Reduction Stage	1		Rated Input Speed(rpm)		3000			
Radial Load(N)	9400		Max Input Speed(rpm)		6000			
Axial Load(N)	4700		Level Of Protection (IP)		IP65			
Efficiency	≥97%		Weight (kg)		14.5			

						Dimensional drawing	Source Engineering INC		
mark	revise	partition	reversion	sign	Y M D		model NO.	142SB□-2000T5	
design			standard				phase marker	weight	scale
check							S		Full
approval							Total 1	No. 1	
process			confirm						