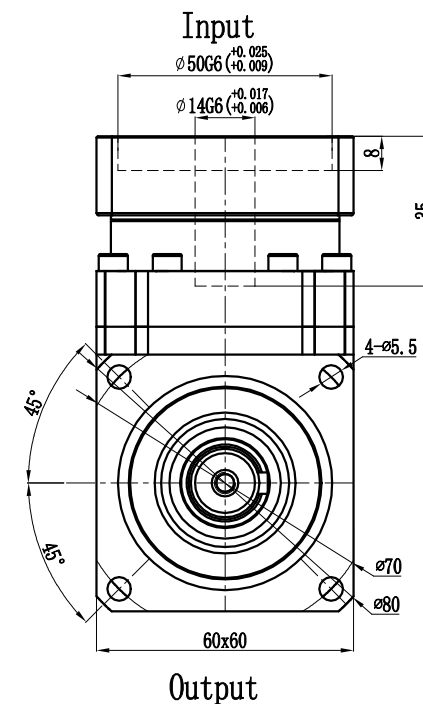
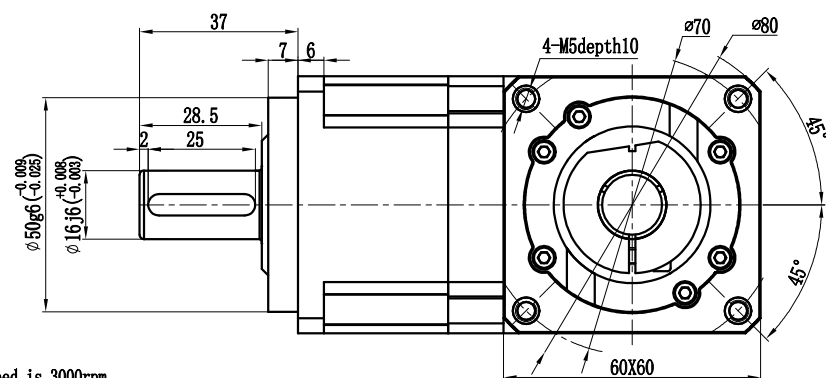
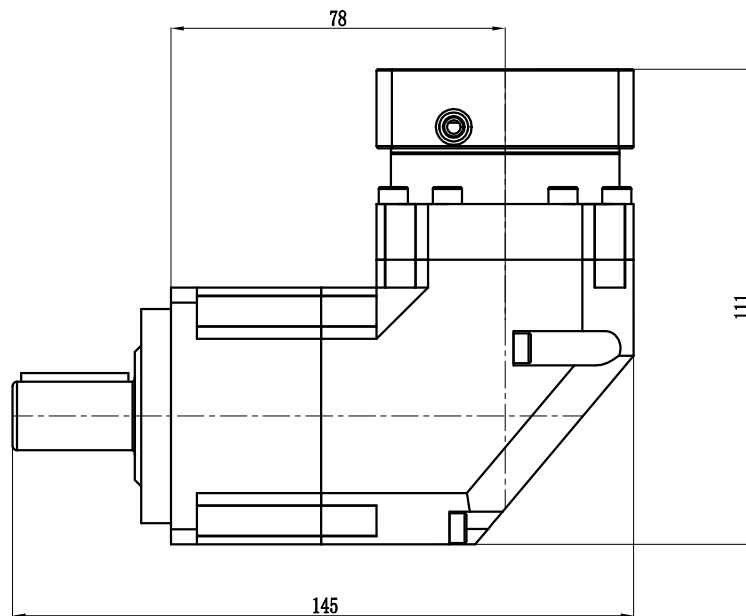


When input speed is 3000rpm

Reduction Ratio	1:3	1:4	1:5	1:6	1:7	1:8	1:9	1:10	1:14	1:20
Rated Output Torque(N.M)	36	48	60	55	50	45	40	40	42	40
Moment of inertia(Kgcm ²)	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.07	0.07
Noise (n=3000, no load, 1m) (dB)	≤73dB									
Instant Torque(N.M)	3X RATED		Backlash(arcmin)		≤6					
Reduction Stage	1		Rated Input Speed(rpm)		3000					
Radial Load(N)	1530		Max Input Speed(rpm)		6000					
Axial Load(N)	765		Level Of Protection (IP)		IP65					
Efficiency	≥97%		Weight(kg)		2.1					

						Dimensional drawing			Source Engineering INC	
mark	revise	partition	reversion	sign	Y M D				model NO.	060SBR□-400T3
design			standard			phase marker	weight	scale		
check						S		Full		
approval						Total 1		No. 1		
process			confirm							