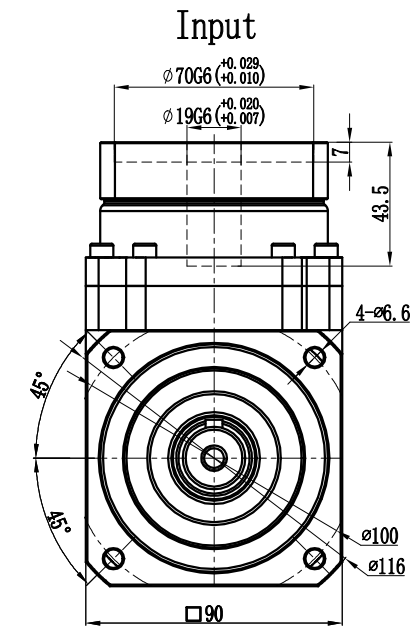
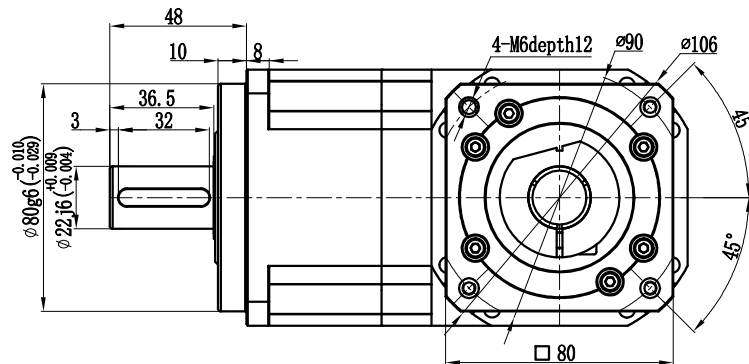
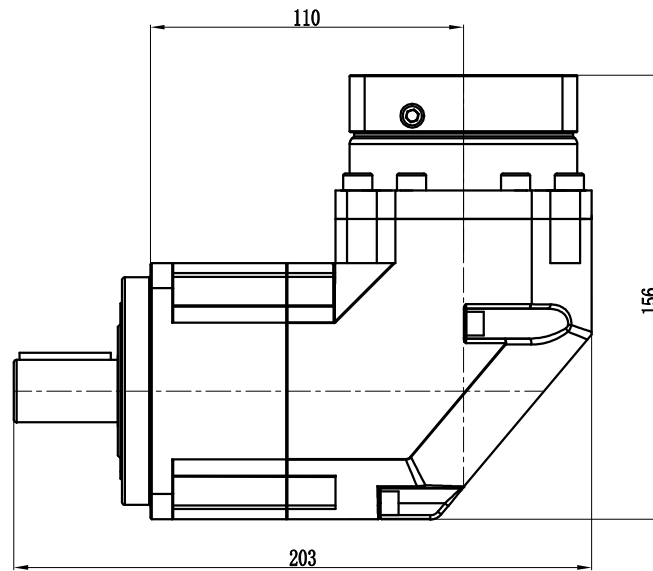


Input

Output

When input speed is 3000rpm

Reduction Ratio	1:3	1:4	1:5	1:6	1:7	1:8	1:9	1:10	1:14	1:20
Rated Output Torque(N.M)	90	120	150	150	140	120	100	100	140	100
Moment of inertia(Kgcm ²)	2.25	2.25	2.25	2.25	2.25	2.25	2.25	2.25	1.87	1.87
Noise (n=3000,no load, 1m) (dB)	≤73dB									
Instant Torque(N.M)	3X RATED		Backlash(arcmin)		≤6					
Reduction Stage	1		Rated Input Speed(rpm)		3000					
Radial Load(N)	3250		Max Input Speed(rpm)		6000					
Axial Load(N)	1625		Level Of Protection (IP)		IP65					
Efficiency	≥97%		Weight (kg)		6.4					

						Dimensional drawing			Source Engineering INC	
mark	revise	partition	reversion	sign	Y M D				model NO.	090SBR□-750T3
design			standard			phase marker	weight	scale		
check						S		Full		
aproval										
process			confirm			Total 1	No. 1			