
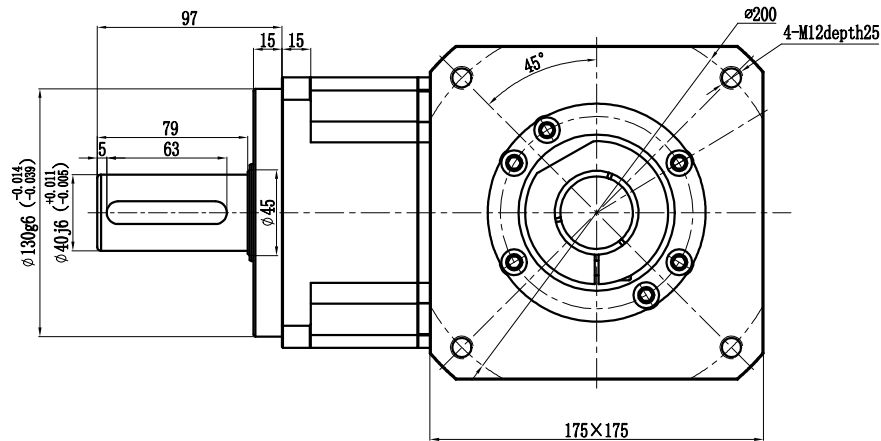
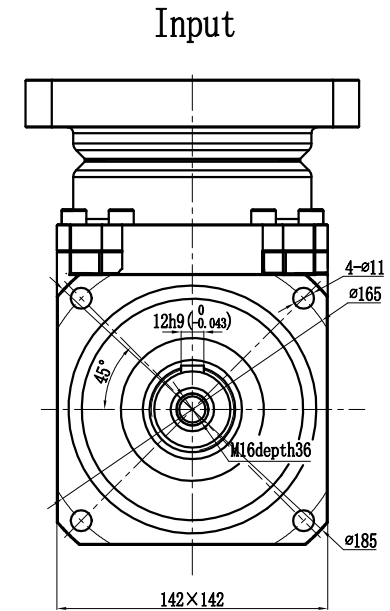


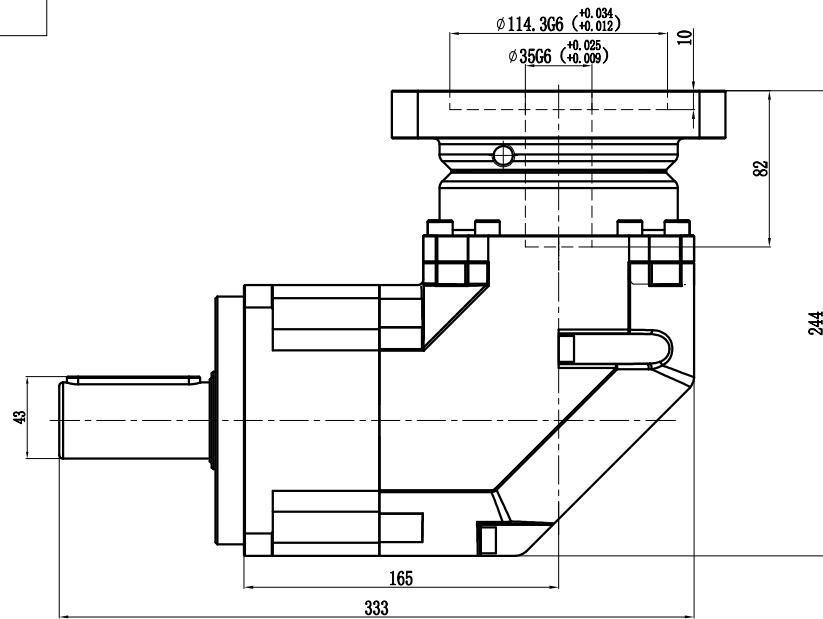

Input

Output

Reduction Ratio	1:3	1:4	1:5	1:6	1:7	1:8	1:9	1:10	1:14	1:20
Rated Output Torque(N.M)	342	520	650	600	550	500	450	450	550	450
Moment of inertia(Kgcm ²)	21.8	21.8	21.8	21.8	21.8	21.8	21.8	21.8	21.8	21.8
Noise (n=3000,noload,1m) (dB)	≤73dB									
Instant Torque(N.M)	3X RATED		Backlash(arcmin)		≤6					
Reduction Stage	1		Rated Input Speed(rpm)		3000					
Radial Load(N)	9400		Max Input Speed(rpm)		6000					
Axial Load(N)	4700		Level Of Protection (IP)		IP65					
Efficiency	≥97%		Weight(kg)		24.5					

						Dimensional drawing			Source Engineering INC	
mark	revise	partition	reversion	sign	Y M D				model NO.	142SBR□-2000T5
design			standard			phase marker	weight	scale		
check						S			Full	
approval						Total	1	No.	1	
process			confirm							